


## K10i+KS10B(3+1B)

- 1、D4.12功放输入灵敏度: 150V (35dB)
- 2、AL-4600功放输入灵敏度: 0.775V (180V)
- 3、处理器数据选择: 3+1B

K10i system processor(IN): A=L B=R C=SUB  
 K10i system processor(OUT): 1=L-HF 2=L-LF 3=R-HF 4=R-LF 5=SUB 6=SUB

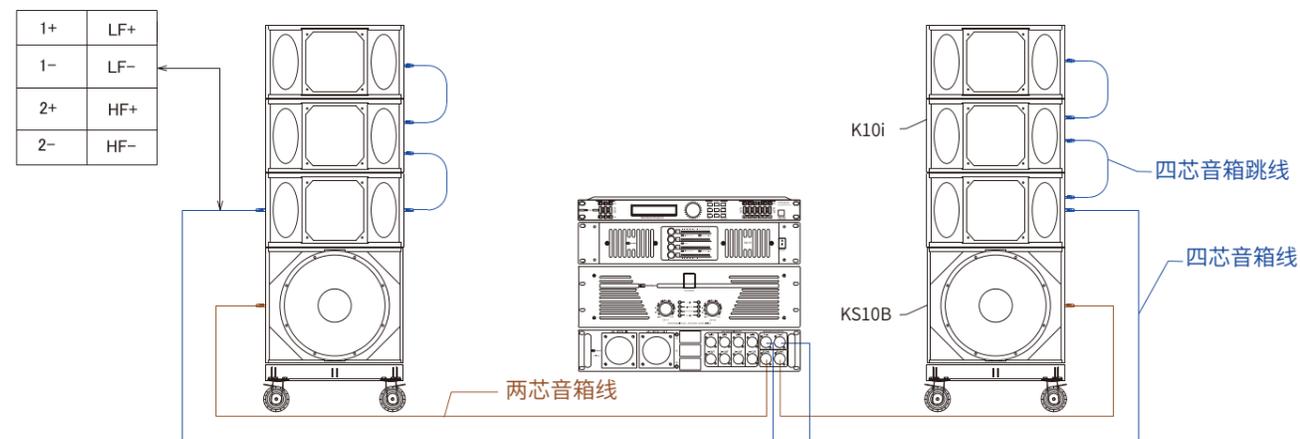

## K12i+KS12B(2+2B)

- 1、D4.15功放输入灵敏度: 150V (35dB)
- 2、AL-4800功放输入灵敏度: 0.775V (180V)
- 3、处理器数据选择: 2+2B

K12i system processor(IN): A=L B=R C=SUB  
 K12i system processor(OUT): 1=L-HF 2=L-LF 3=R-HF 4=R-LF 5=SUB 6=SUB

